





Vent-Bettina

Designed in 2002

shown in Brushed Nickel
with wood blades



	Safety cage compatible
	Suitable for Damp Location**
	Proudly Assembled with American Labor
	Handmade

shown in Polished Chrome with
metal blades and safety cage



The Vent-Bettina rotational fan is thoughtfully designed with its arms gently upward curving. The fan offers fluid lines and quiet axial rotation with motor heads which can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed.

- Matthews rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans.
- Constructed of cast aluminum, heavy spun and stamped steel, the Vent-Bettina carries a limited lifetime warranty.
- Each unique motor mount and fan head knob is made of genuine marbled Bakelite.
- The Vent-Bettina is available with the following blade options:
 - metal fan heads with decorative metal blade guards
 - solid, ecologically harvested Brazilian mahogany fan heads without blade guards
 - metal fan heads with metal safety cages for use in low ceiling applications (7 ft in US / 8.2 ft in Canada)

Standard Finishes

Matte Black	Bronze (Plate)	Bronzette (Powdercoat)	Brushed Brass	Black Nickel	Agua Marinha	Safira	Ametista	Ouro
Brushed Nickel	Polished Chrome	Polished Copper	Brushed Copper	Polished Brass	Jade	Esmeralda	Citrino	Rubi
			Brushed Nickel Damp	Polished Chrome Damp	Gloss White			


Special Order Finishes

Vent-Bettina

weight: 19 lbs
voltage: 110/220



10", 20", 30", 48" or 72"
downrods available

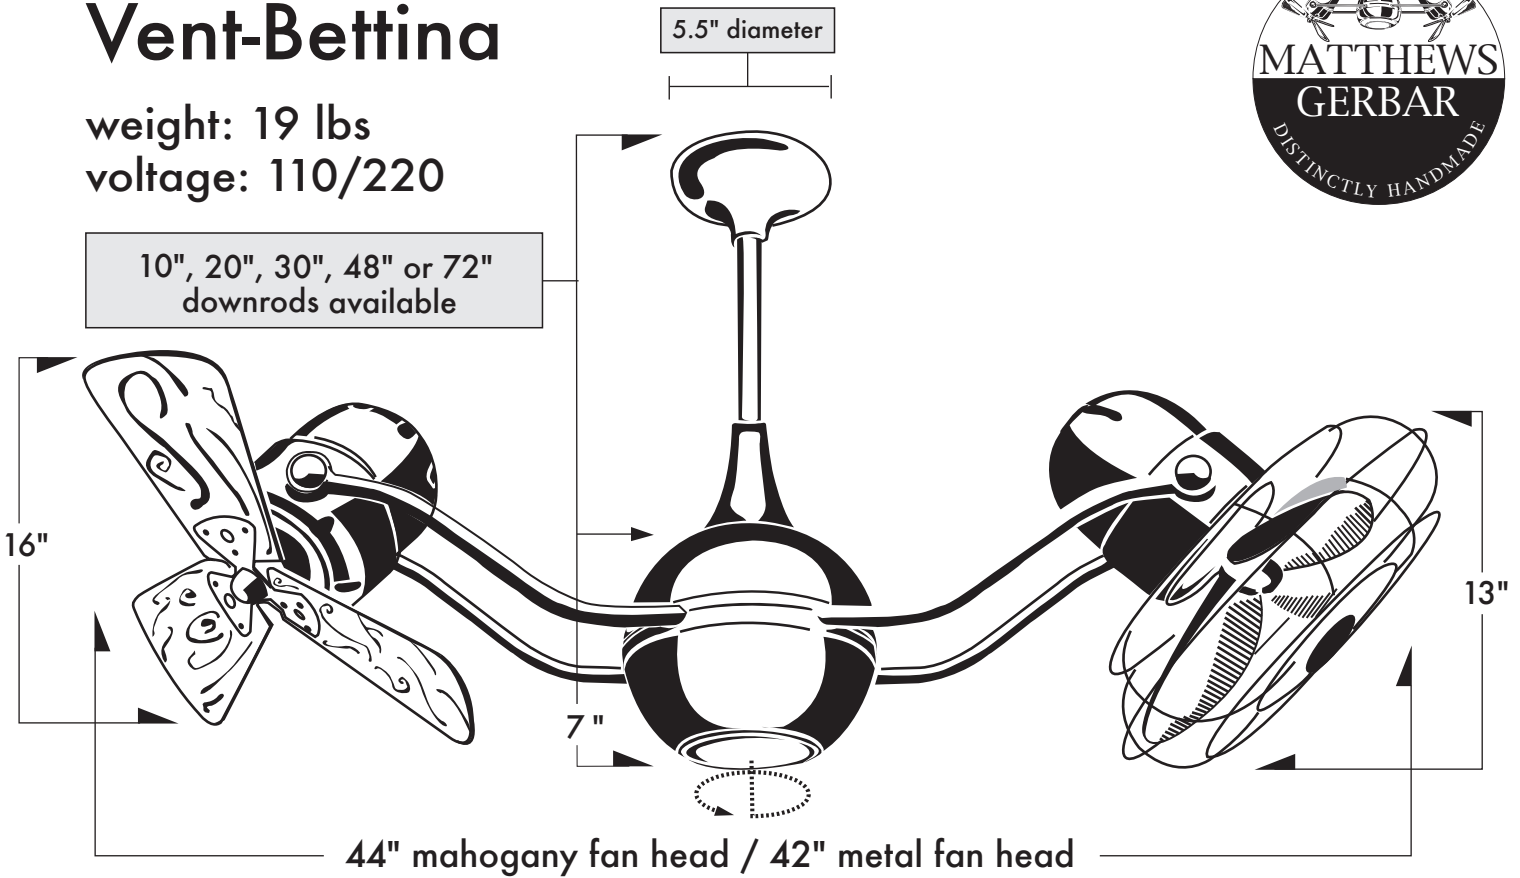

44" mahogany fan head / 42" metal fan head

Increasing Angles of Fan Heads to Support Poles Increases Speed of Axial Rotation
Optimum Fan Head Position is 60°

CFM: 4240
(Wood Fan Head)
Blade Pitch 19°

CFM: 3201
(Metal Fan Head)
Blade Pitch 31°

Standard Equipment:

- Lutron decora-style SFS-5E fully variable wall switch in white
- 10" downrod. 20", 30", 48" or 72" downrods available. Downrods can be easily field cut; they are not threaded.
- Flat ceiling canopy. Compatible with 29° vaulted ceiling canopy accessory.

Metal fan heads with protective powder or clear coatings are suitable for Damp Location.

Safety cages available for low ceiling applications.

**Damp location with powder or clear coat only. Not recommended for salt water/ocean front applications.



**Damp Location